

# DEUTZ TCD 13.5

Powerful, efficient and compact.



For mobile machinery

The TCD 13.5 L6 – With 338 up to 454 kW power output ideal for your application.

- **POWERFUL** / Up to 454 kW & 2757 Nm
- **LOW EMISSIONS** / EU Stage V & Tier 4f certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / EDG - Version\* (Stage IIIA & Tier 0)
- **POWERPACK** / Modular, compact & ready for installation





STAGE **V**  
certified **V**®

\*Emission Downgrade without EAT

DEUTZ TCD 13.5 L6


— TCD 13.5 L6

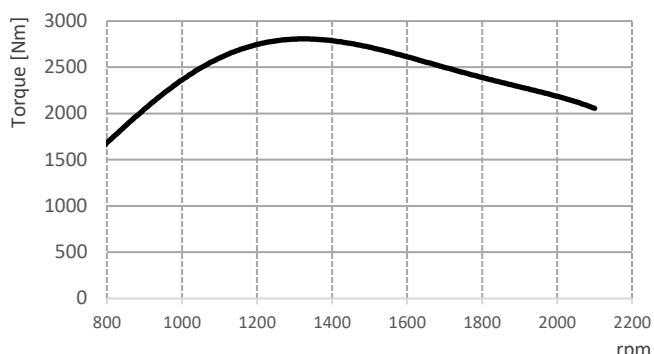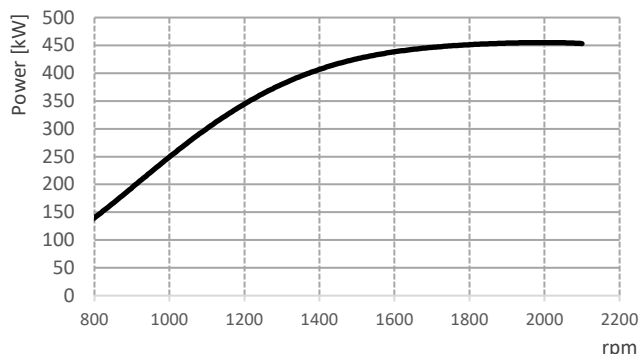

TECHNICAL DATA

ENGINE TYPE	TCD 13.5 L6	
No. of Cylinders		6
Displacement	l	13.5
Max. Nominal Speed	min <sup>-1</sup>	2300
Aspiration		Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	338 - 454
At Speed	min <sup>-1</sup>	1700 - 2100
Max. Torque	Nm	2757
At Speed	min <sup>-1</sup>	1100 - 1500
Min. Idling Speed	min <sup>-1</sup>	800
Weight (DIN 70020 Part 7A)	kg	1012

DIMENSIONS

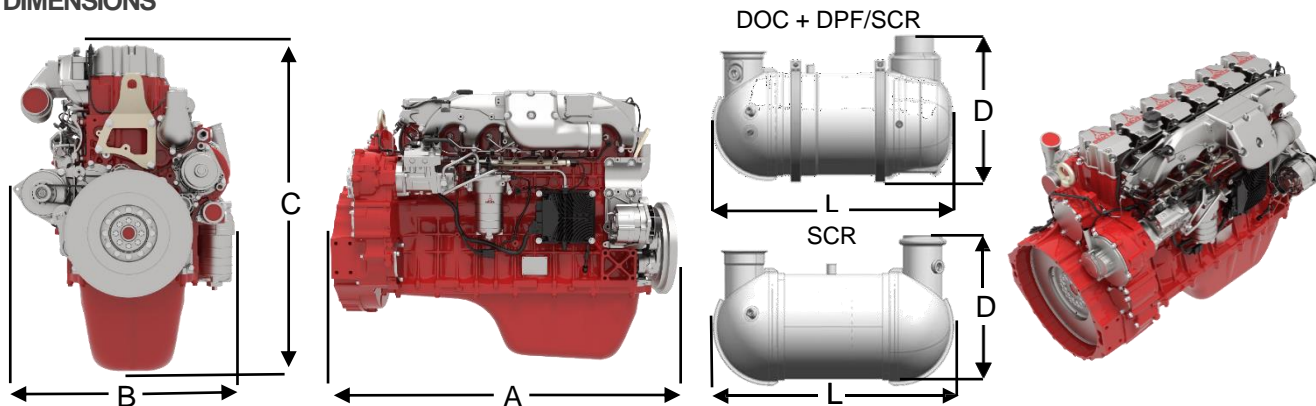

ENGINE TYPE		A	B	C	D	L	D	L	DOC + DPF/SCR	SCR
TCD 13.5 L6	mm	1378	852	1161	806	1312	360	1377	●	■

- Standard for US Tier 4
- Standard for EU Stage V



DEUTZ AG  
 Ottostraße 1  
 51149 Cologne  
 Germany  
[www.deutz.com](http://www.deutz.com)  
[www.sdeutz.com](http://www.sdeutz.com)