

Stauffer Diesel / Stadco Ultra-Compact Power Packs

DEUTZ 74 HP High Torque Diesel + EPA Tier 4 Final

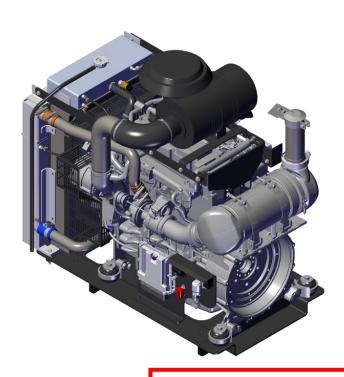

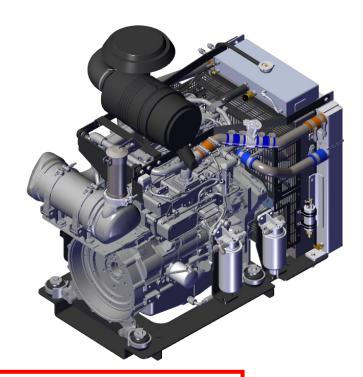

DEUTZ TCD 3.6HT - Open Power Pack

- Each compact diesel power pack is fully assembled and test run at Stauffer Diesel / Stadco.
- Compact power packs are engineered and EPA Tier 4 Final certified as a unit.
- Minimal application installation approval is required; pre-qualified, pre-validated.
- ◆ Routine service points are all on the right side.
- ◆ DEUTZ 4-cylinder, water-cooled model: TCD3.6 74 hp continuous duty rating Extraordinarily strong engine with 288 ft. lbs. of torque.
- ◆ DEUTZ TCD 3.6 with "DOC only" exhaust after treatment equals maintenance free operation under all applications and ambient conditions. DOC is open type, flow-through design, requires no down-time, no regeneration, and no emissions fluid.
- Murphy TEC-10® control panels are standard on all compact power units. TEC-10® is flexible and rugged, withstands harsh weather environments, and offers easy to read displays even in sunlight.


Stauffer Diesel Inc / Stadco


DEUTZ Distributor since 1956


Engine Type		TCD 3.6 HT
No. of cylinders		4
Bore/stroke	mm in	98/120 3.9/4.7
Displacement	L cu in	3.6 221
Max. nominal speed	min -1 rpm	2300
Power output as per ISO 14396 *	kW hp	55.4 74
at speed	min -1 rpm	2300
Max. torque	Nm lb/ft	390 288
at speed	min -1 rpm	1300
Minimum idling speed	min -1 rpm	800
Specific fuel consumption **	g/kWh lb/hp	h 210 0.35

^{*}Power data without deduction of fan power

^{**}Best point consumption refers to diesel with a density of 0.835 kg/dm3 at 15°C.

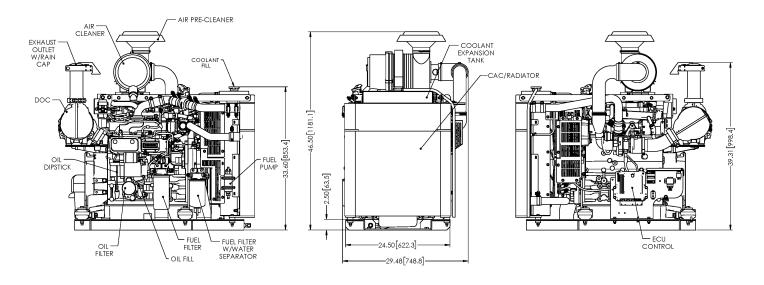

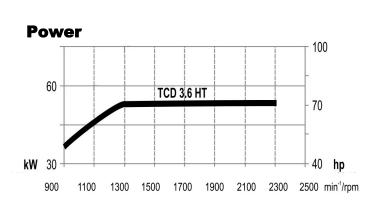

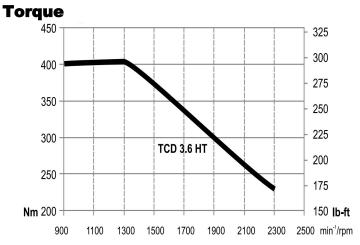



Stauffer Diesel Inc / Stadco

